




MODULAR ROBOTIC SYSTEM RTE 400


Welcome to the world of welding robots!

igm



A Member of



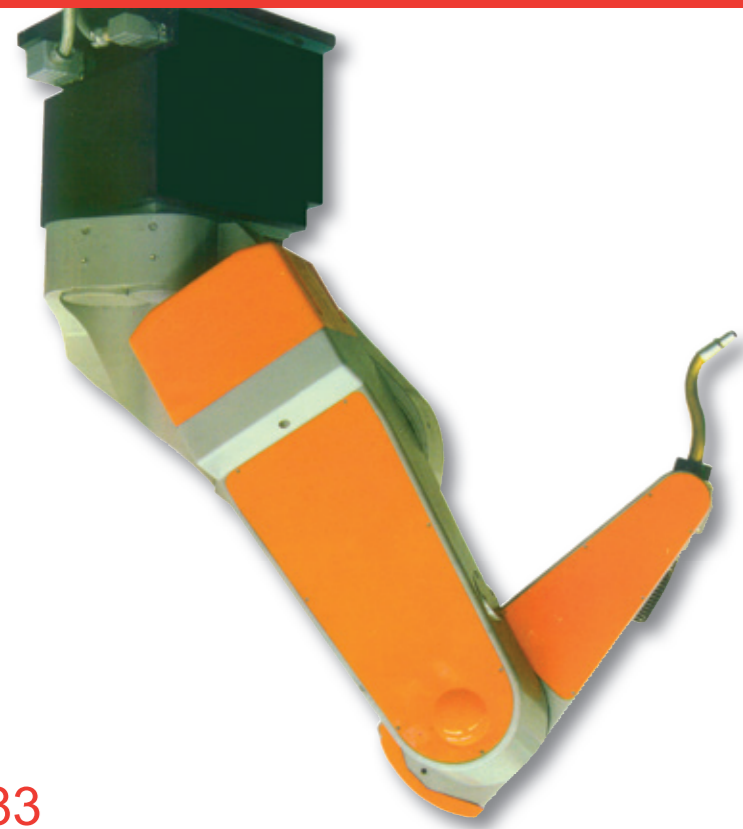

1983

First five-axis igm robot - year of construction: 1983 - already had a hollow shaft for the torch hose package in the robot's wrist. Many welding units from that time are still in use today.

DEVELOPMENT ...

Thirtyfive years ago, we developed the world's first robot suitable for industrial arc welding. Straight or circular welds of any desired length could be programmed with only 2 or 3 points, the welding speed was set directly and it could be changed during execution of the program. With its arc-controlled seam tracking function, **it was years ahead of the state of the art at the time.**

Two years later the first five-axis articulated-arm-type robot has been presented. Even at the time, it was noted for its design, which has been retained to this day, with the angular extension arm on the 1st axis with a 540° work zone. The optimal, toroidal work zone and the hollow shaft in the "wrist" of the robot for feed-through of the torch hose package are **features which have often been copied over the years, but never surpassed.**



OF THE NEW RTE 400 SERIES

Mechanical components newly available on the market, a series of our own new system modules, and the demands of many customers for an enlarged work zone prompted the planning of a production series of welding robots comprising several different modules.

- > The incorporation of an additional rotating mount and a longer swivel arm greatly extends the work zone of articulated robots.
- > An additional swivel-arm module with another rotation axis greatly improves welding access to complex work pieces during fixed robot assembly.
- > Optimal set up of all system components permits a reduction in transfer time by up to 30% for all construction sizes.
- > 1 or 2 wire feed units together with all hose package connections and media supply lines have been integrated in the main rotation axis. Accordingly, all the gas and water supply hoses as well as all the wire guides for single-wire and tandem welding are located inside the housing.
- > All the advantages typical of igm robots have been retained in full:

Outstanding programming techniques with both the programming teach pendant and the offline teaching system. Large work zone and perfect welding access to seam positions due to an optimal axial geometry and holding of the welding torch in the wrist axis, implemented as a hollow shaft. The torch and the hose package are optionally interchangeable. All cables are inside the robot arms using hollow shafts.



2017


Eight-axis articulated-arm-type robot

THE MODULES OF THE RTE 400 SERIES AND THE WORK ZONES OF THE DIFFERENT CONSTRUCTION SIZES

All the modules are suitable for standing or suspended robots.

Due to the unique properties of the hardware and software modules we have developed, our systems have been used by the world's leading companies. We are confident that the enlargement of the work zone and the further improvement of welding access will expand the range of applications and win new customers.

Second swivel arm, short version
with motors for rotation axis
and wrist axes

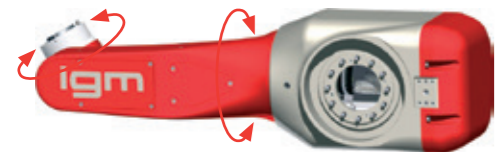

Wrist/torch axes
Tilt through 270°
Rotation through 720°

Second swivel arm
Tilt through 270°
Rotation through 360°

First swivel arm, short version
with motor and drives for the
mounting of the second swivel arm



First swivel arm tilt through 270°

Angular extension arm
with motors and drives for the vertical
axes and the 1st swivel arm,
central cable bushing,
integrated wire drive
and media supply




Rotation range vertical
main axis 540°

Standard robot base
with connections for all media
and mechanical safety limits for
the 540° rotation range of the
vertical main axes



All wire feed units
are fitted with a cover
for protection against
contamination

Rotating robot base
Rotation range of vertical axis 540°

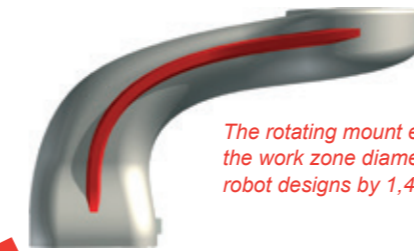

First swivel arm, long version
with motor and gears for the mounting
of the second swivel arm



Variant: first swivel arm
with additional rotational axis




Rotation range 240°



Second swivel arm, long version

*Particularly in the case of installations
without linear axes, this articulated axis
provides considerably improved welding
access to complex work pieces.*

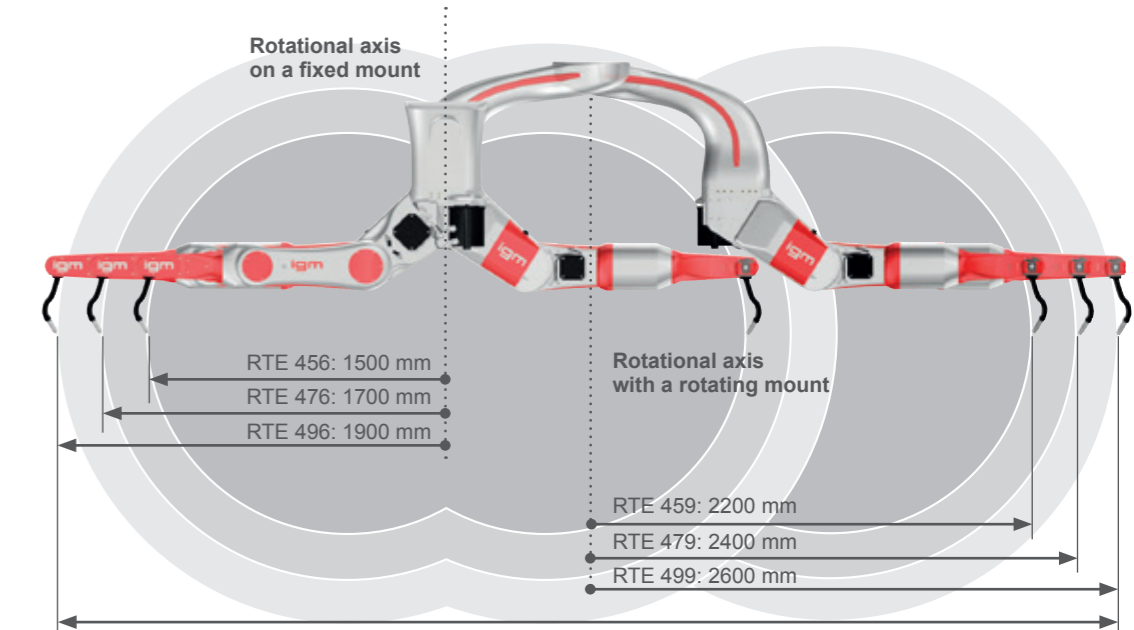

The maximum work zone diameter of 5,200 mm can be extended as needed with the external rotation and linear axes.

Hollow shaft wrist axes
with different diameters / tool adaptors



WELDING EQUIPMENT AND SENSORS

Wire Feed

- > Extremely flat design
- > Integrated in the main axis
- > Protected by cover
- > Wire guide in the axis
- > No exposed hoses
- > For single-wire and tandem welding processes
- > Fully accessible manual control push-buttons
- > Hinged medium plate
- > New central connection with quick-release coupling
- > Integrated electrical wiring



Torch cleaning and torch exchange system

External and internal cleaning of torch with wire cutter



Deposit device for interchangeable torch



Torch attachments and welding torches



Over 50 different MIG/MAG single torches (air-cooled and water-cooled)

MIG/MAG tandem torches


Wire feed "TorchDrive" integrated in the hollow shaft for single and tandem welding

TIG torches with or without wire feed



BWS torch exchange system with magnetic torch disconnection

Oxyacetylene and plasma cutting torches and various adaptors for processing tools as well as assembly and measuring

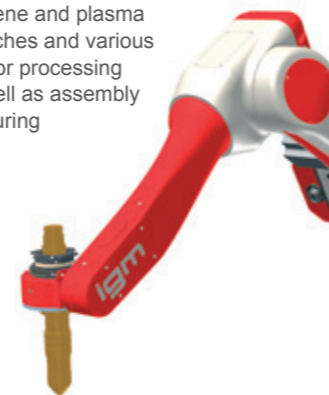

Gas nozzle and arc seam tracking

Even 40 years ago, our special-purpose welding machines came equipped with this seam-tracking method, and with the development of our first welding robot Limat 2000 in 1981, we perfected the software for it.

The iLS weld groove sensor

A distance sensor with linear image sensor with high image resolution scans the surface of the workpiece and recognises even the smallest joints.



The iCAM laser camera

The camera is mounted on the wrist axis of the robot. It measures the position and volume of the weld groove online and adjusts the robot movement and the welding parameters accordingly. For the purpose of welding in narrow workpiece ranges, the camera can be repeatedly removed during the welding program.





The functions and parameters of all the sensors are entered, displayed, and optimised via the teach pendant. No additional equipment is required for programming.

The iCAM is available with a field of view from 25 to 150 mm with a resolution from 0.02 mm. It can be perfectly used for all applications, from TIG thin sheet welding, aluminium welding up to Tandem multilayer welding of fine grained steel.




The fields of view of the iCAM Laser cameras range from 25 to 150 mm, depending on the model.

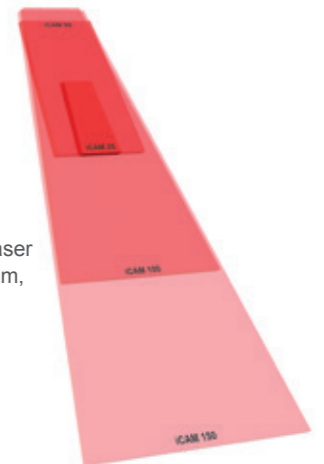

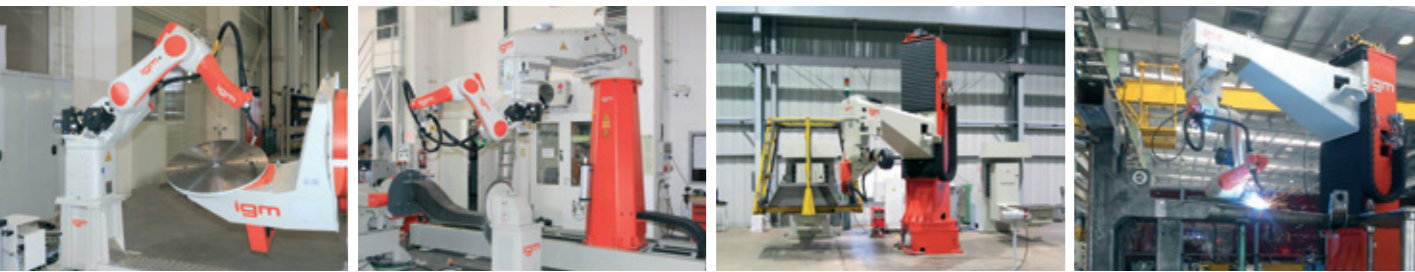


ROBOT COLUMNS AND FLOOR-TRACKS


The modular construction of the rotary and longitudinal chassis components enable the design of robotic systems for quite different part sizes and production conditions.

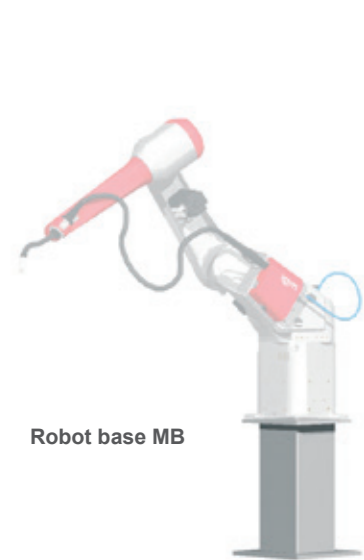


Robot base MB

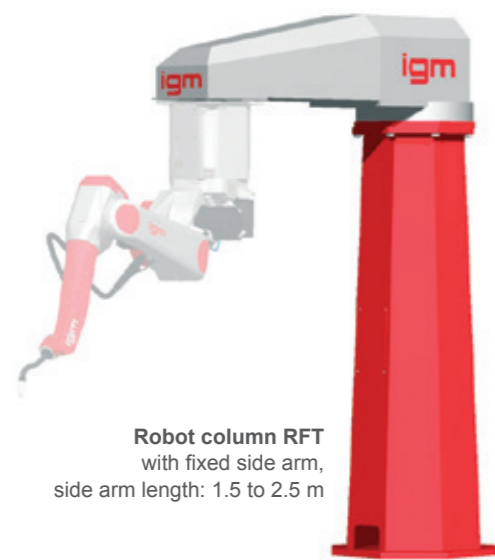


Robot column RFT with fixed side arm, side arm length: 1.5 to 2.5 m

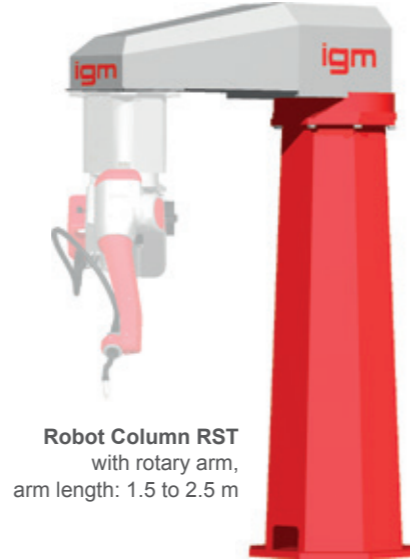

Robot Column RST with rotary arm, arm length: 1.5 to 2.5 m

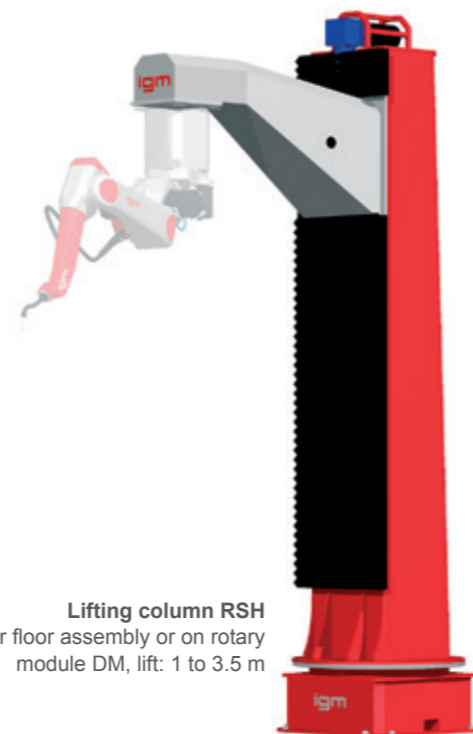


Lifting column RSH for floor assembly or on rotary module DM, lift: 1 to 3.5 m

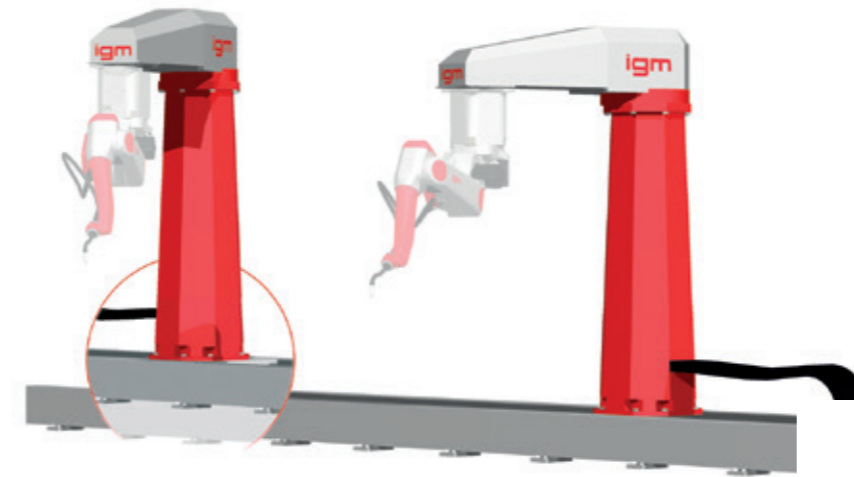

Floor track RTS for mounting one or more RST or RFT robot columns, carriage way: up to 85 m



Lifting column RSH with cross slide TQA, carriage way: 1.5 to 3 m

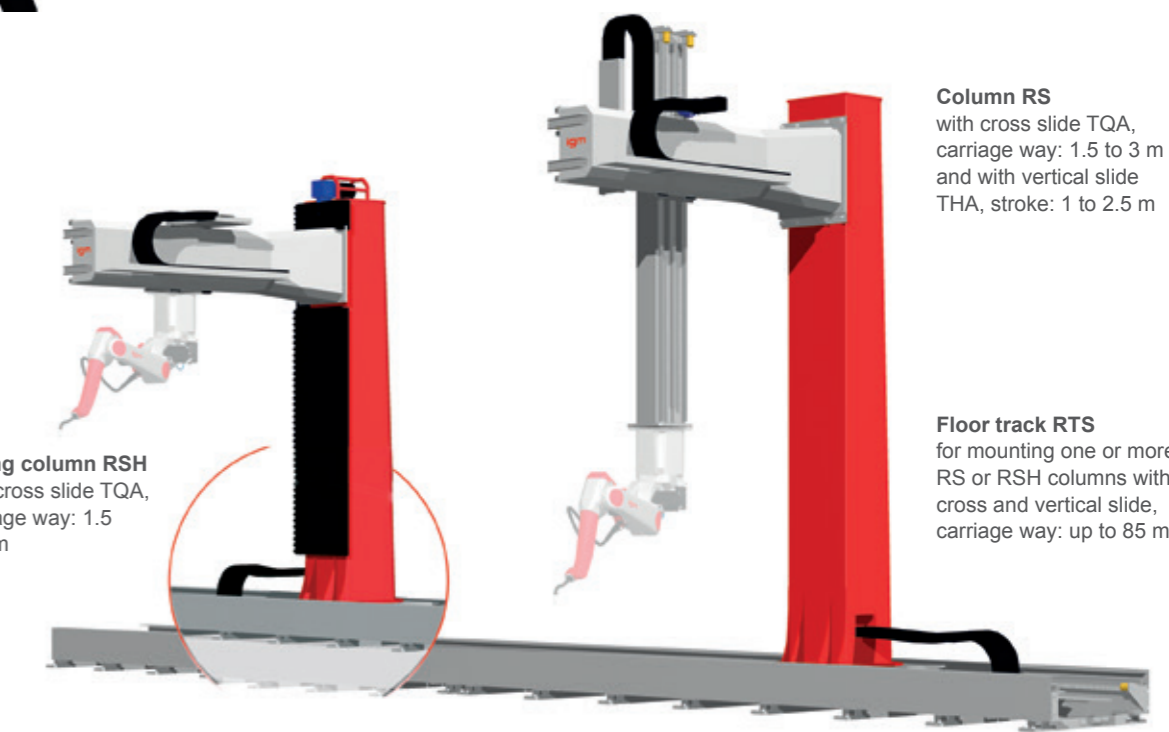


Column RS with cross slide TQA, carriage way: 1.5 to 3 m and with vertical slide THA, stroke: 1 to 2.5 m

Floor track RTS for mounting one or more RS or RSH columns with cross and vertical slide, carriage way: up to 85 m

OVERHEAD SLIDE SYSTEMS AND ROBOT GANTRIES


The overhead design of the slide systems permits free access for the loading of the workpiece manipulators with indoor crane or conveying system. This allows the implementation of flexible manufacturing lines in a cost-effective and space-saving manner. **Travel distances up to 150 m**

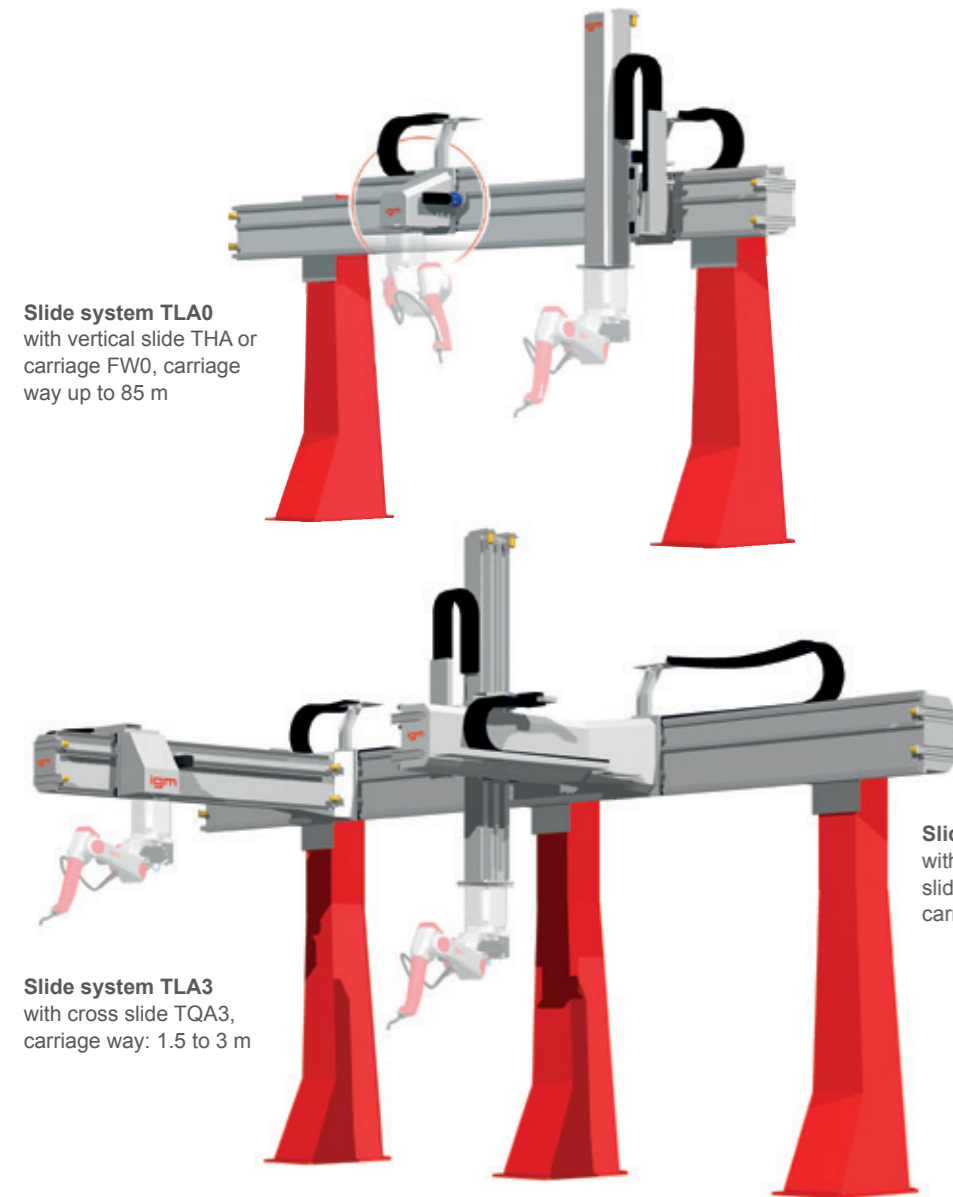

Slide system TLA0
with vertical slide THA or carriage FW0, carriage way up to 85 m

Slide system TLA3
with cross slide TQA3, carriage way: 1.5 to 3 m


Slide system TLA3
with cross and vertical slide TQA3 and THA, carriage way 1.5 up to 3 m

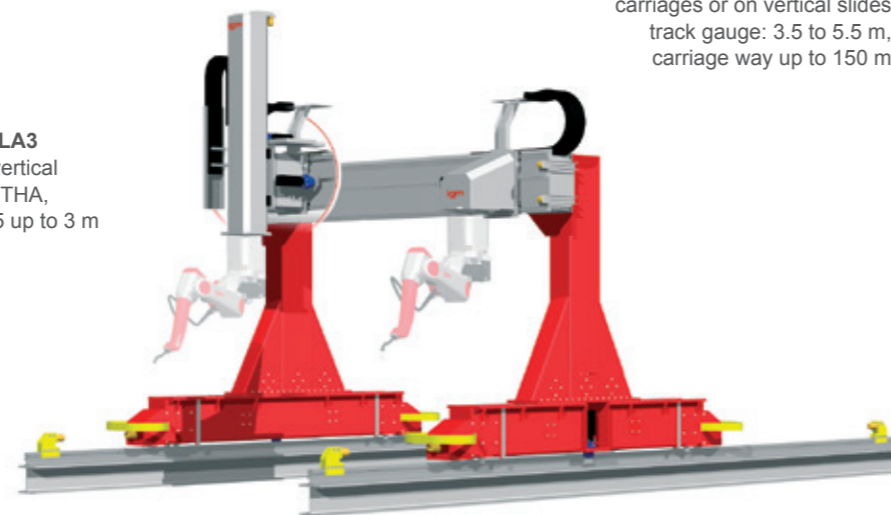


Robot gantry TPA1
for one or two robots on carriages or on vertical slides
track gauge: 3.5 to 5.5 m, carriage way up to 150 m



Robot gantry TPA2
for assembly on a separate supporting system,
track gauge: 3.5 to 5.5 m, carriage way up to 150 m

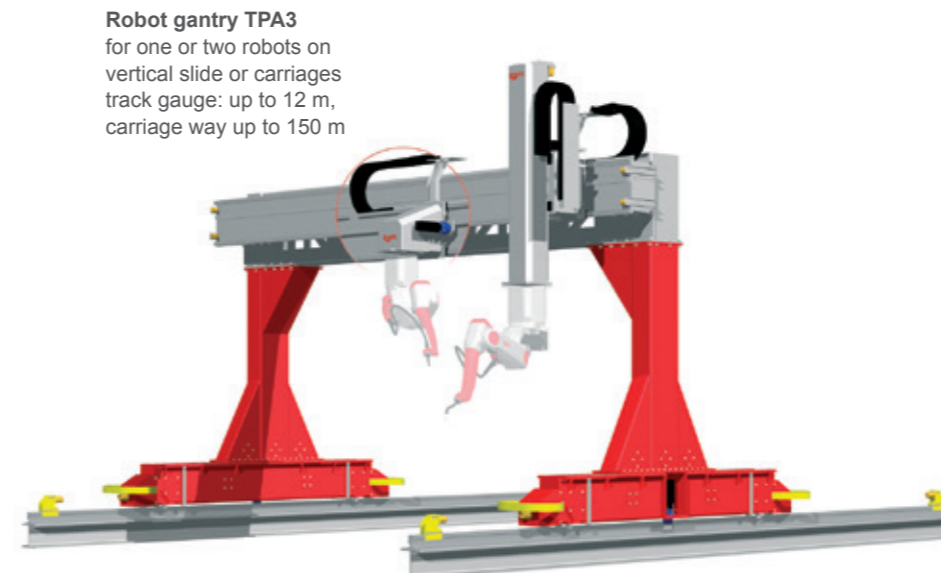

Robot gantry TPA3
for one or two robots on vertical slide or carriages
track gauge: up to 12 m, carriage way up to 150 m

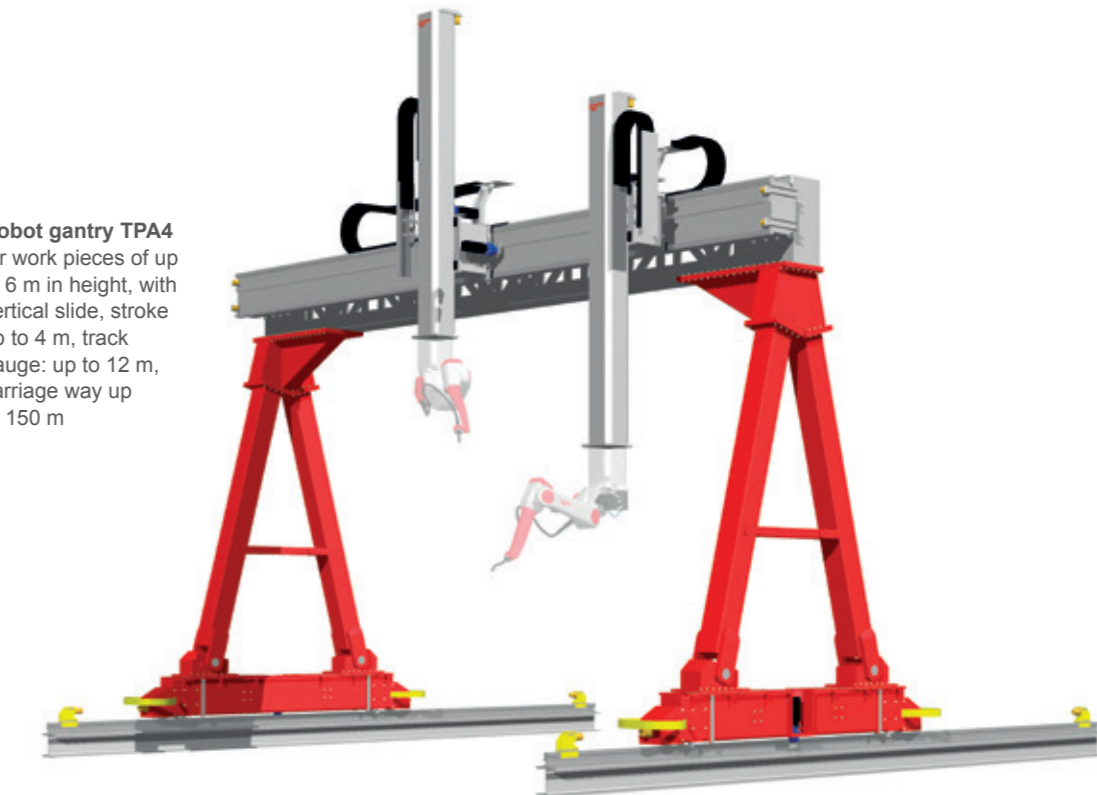

Robot gantry TPA4
for work pieces of up to 6 m in height, with vertical slide, stroke up to 4 m, track gauge: up to 12 m, carriage way up to 150 m




WORKPIECE MANIPULATORS


Roller block RB
as tailstock for the
rotating devices RP





Headstock manipulator RP
with RFP tailstocks
with a locking position for net loads
between 150 and 25,000 kg

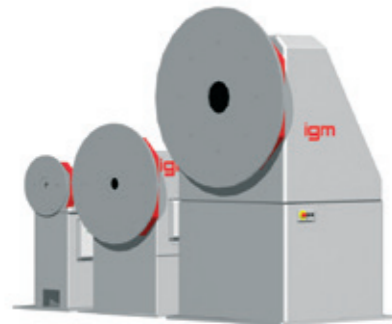


Rotary tilting table RP2
net load of 150 to
25,000 kg

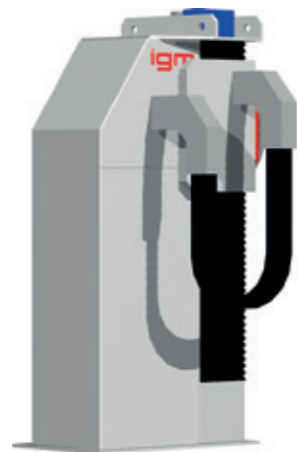

Headstock manipulator
with lifting device RPH
with tailstocks RFPH
on motor-powered
displacement track,
stroke of 1 to 1.5 m

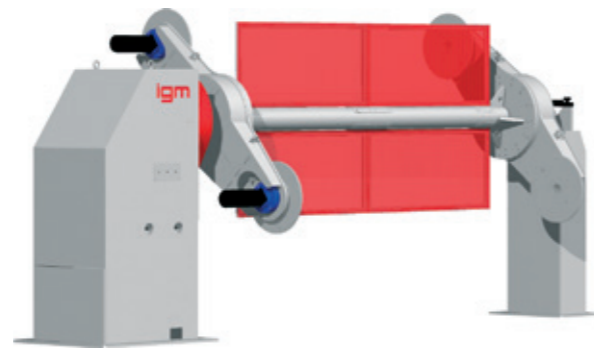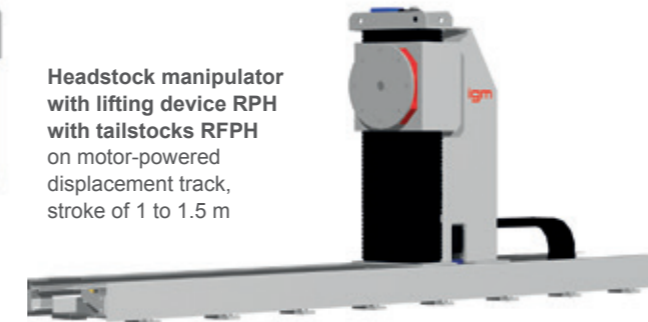


3-axis turning device RP3
with a station load capacity of 300 to 2,000 kg

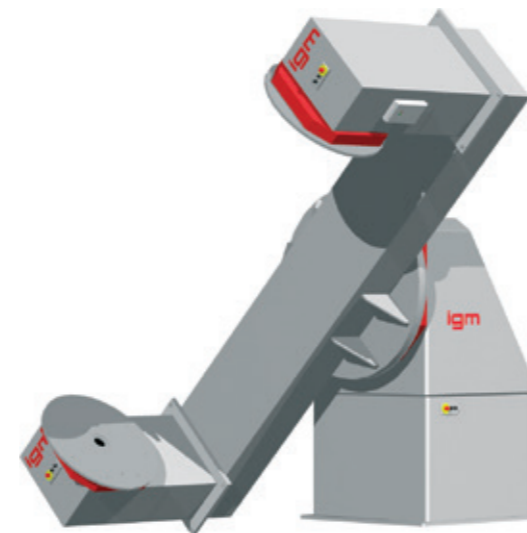


Rotating device in swivelling C-frame
with a station load capacity of 300 to 4,000 kg




Displacement track VB for tailstocks
driven manually or motor-powered, carriage way: from 2 m

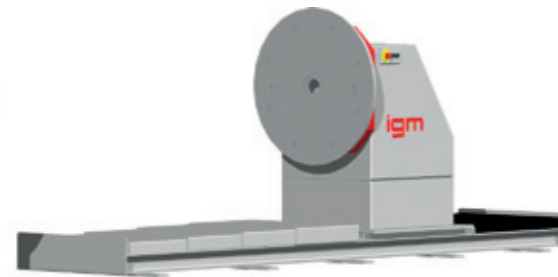

L-Manipulator RWM2
with rotational radius of
up to 2.3 m and net
loads of up to 15,000 kg

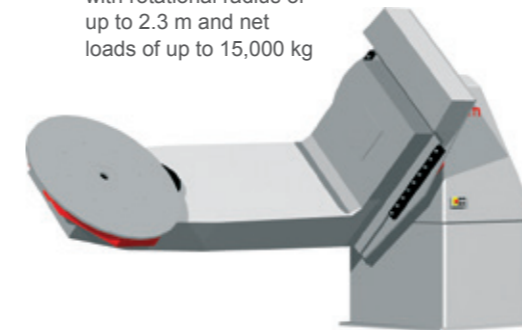

Combinations
of standard manipulators for
special customer requirements

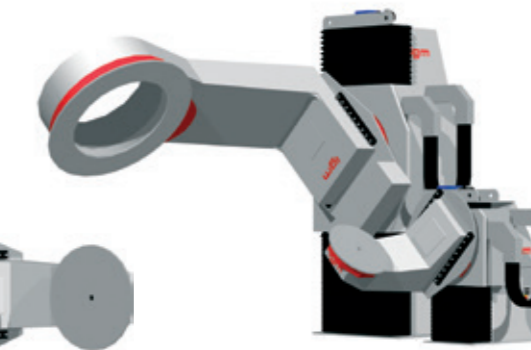

L-Manipulator with lifting device RWM3
with stroke between 500 mm and 1.6 m, net
loads of up to 15,000 kg



Rotary table with H-frame RWV
for turning device with faceplate
distance of 1,200 to 3,600 mm,
load capacity of up to 1,000 kg
per station



**Rotary table with
rotary tilting tables RP2**
Load capacity of 500 to
1,000 kg per station



Compact system RSX
with rotary arm RST and L-manipulator RWM2
designed for welding systems with one or two
stations, load capacity from 500 to 1,000 kg per station



Compact system RRMK
central galleys with rotary table and head- /
tail stock units, 2 stations, load capacity
from 600 to 1,000 kg per station



Compact system RRMK/RP2
central galleys with rotary table and
rotary tilting tables units RP2,
load capacity 1,000 kg per station



Compact system P2W
pre-engineered 2-station robot cell with
rotary table and head- / tail stock units, load
capacity 300 kg per station

PROGRAMMING AND OFFLINE TEACHING

Programming

The key unit of the RCE system, the igm teach pendant incorporates all functions for the creation and optimisation of robot programs, including all sensor functions. No additional equipment is necessary.

The lightweight teach pendant is operated via a 8.4" touch screen. On the back side there is provided a USB plug for mobile data storages.

A joystick fitted on the side of the housing is used for the quick and simple movement of the robot as well as all external rotation, slide, and manipulator axes. A choice of three different modes of operation is available:

- > Tool motion in world mode
- > Changing the tool orientation in world mode
- > Movement of tracks and external axes with fixed TCP



The simple and superior programming technique of our welding machines is a crucial factor influencing purchasing decisions for many of our customers

Offline teaching

Offline teaching involves workpiece-oriented programming in 3D mode using a PC and simulation software. The workpiece is first imported into the programming system as 3D-CAD geometry, then the movements of the robot are determined. For path generation and definition of the processing parameters, a number of automatic functions as well as data bases stored in the control system are available.

It is a simple system using the same programming method as the robotic system in the workshop and offering the key advantage that the use of the teach pendant means the use of an identical software for all calculations. This eliminates the need for any machine parameter or robot program conversions, and all program changes on the installation can be further processed using the offline system without conversion losses.

Features

This offline programming method integrates as a matter of course:

- > Arc-controlled seam tracking
- > iLS laser sensor
- > Automatic laser TCP-correction
- > Gas nozzle tracking with scanning of the simulated workpiece.
- > tactile TCP-correction for localisation of parts and joints
- > Torch exchange

Additional functions

RoboNet	remote maintenance (via VPN)
ISDES embedded	welding data recording and monitoring
iPAT	offline manipulation and assembly of robot programs
SmartStep	assembling of program parts to robot step programs
iSCRIPT	programming language for solving the most complex tasks
OPC-UA	machine-to-machine communication protocol

Advantages of igm offline teaching

- > Reduction of downtime by setting up programs during main production time.
- > Accessibility check and collision monitoring
- > Programming without risk of accident and with a clear view of seams difficult to access
- > Support through many automatic functions
- > Program setup with all functions corresponds to online programming
- > No additional training is necessary
- > Offline teaching can also be used as a training tool
- > CAD/CAM couplings with simple import of 3D-CAD workpiece data.
- > Support during the construction period with regard to suitable design for robotic use

WE PLAN AND WORK FOR YOU:

At our production sites and further sales and service facilities throughout the world:



igm Robotersysteme AG
Austria

AUSTRIA
igm Robotersysteme AG
IZ NÖ-Süd
Str. 2a, Obj. M8
2355 Wiener Neudorf
Austria
T: +43 (2236) 6706-0
F: +43 (2236) 6706-99-101
E: office@igm-group.com
www.igm.at



igm Robotrendszerek Kft.
Hungary

HUNGARY
igm Robotrendszerek Kft.
Ipari Park
Csörgőfa sor 1
9027 Győr
Hungary
T: +36 (96) 511 980
F: +36 (96) 518 999
E: gyoer@igm-group.com
www.igm.at



igm Robotic Systems, Inc.
USA

USA
igm Robotic Systems, Inc.
W133 N5138 Campbell Drive
Menomonee Falls
WI 53051
USA
T: +1 (262) 783-27 20
F: +1 (262) 783-27 30
E: igmusa@igmusa.com
www.igmusa.com



Beijing Aijiemo Robotic System Co., Ltd.
China

CHINA
Beijing Aijiemo Robotic System Co., Ltd.
Building 40, No. 4 Dongdajie, Nankou Town
Changping District,
Beijing 102202
China
T: +86 (10) 6977 8000
F: +86 (10) 6977 8005
E: office@igm-china.com
www.igm-china.com

